


Estimate No:-RJMSGK-11 Dated: 18.09.2022

Estimate for APS to 5HP GKIP Sets of Sri.Shillappa (Shillanayaka) S/o Dandanayaka(Donkaiah) at Udboor Village Land at Sy No.47, Kalalavadi Village, in Jayapura Section R.K.nagar Sub-division.

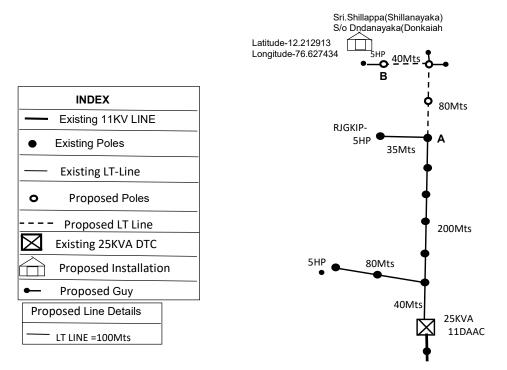

Report: This estimate Amounting <u>Rs=52571.00</u> has been preparing for APS to 5HP GKIP Sets of Sri.Shillappa (Shillanayaka) S/o Dandanayaka(Donkaiah) at Udboor Village Land at Sy No.47, Kalalavadi Village, in Jayapura Section R.K.nagar Sub-division.

For APS to the above said 5HP GKIP Set at Jayapura IP Limit, It is proposed to Extending the LT- Line from existing LT-Line of 25KVA Dandanayaka GK-DTC (11DAAC), point "A" to "B" at about 120Mts, as shown in the Sketch. The necessary required materials are providing in the estimate. the proposed 5HP GKIP Installation comes on 11KV Line of Kalalavadi IP feeder eminating from 66/11KV SOUTH MUSS, in Jayapura Section R.K.nagar Sub-division.

Hence I am here with Submitting the estimate for your Kind needfull sanction.

Assistant Engineer(Ele) Jaypura O & M Section, CESC, Mysore. Assistant Executive Engineer (Ele) R.K.Nagar Sub-Division, CESC, Mysore.



Estimate No:-RJMSGK-11 Dated: 18.09.2022

Estimate for APS to 5HP GKIP Sets of Sri.Shillappa (Shillanayaka) S/o Dandanayaka(Donkaiah) at Udboor Village Land at Sy No.47, Kalalavadi Village, in Jayapura Section R.K.nagar Sub-division.

SL NO	Name of the Materials	Unit	Quantity	Materials		Labour	
				Rate	Amount	Rate	Amount
1	RCC Pole 8Mts long	No.	2	5306.00	10612.00	1072.00	2144.0
2	PSC Pole 8Mts long	No.	1	3578.00	3578.00	1072.00	1072.0
3	Guy Set	Set	3	1179.00	3537.00	448.00	1344.00
4	Guy Concrete Materials	Set	3	0.00	0.00	200.00	600.00
5	4Pin Crass Arms	Set	4	439.00	1756.00	122.00	488.00
6	1.1KV Polymeric Pin Insulator	No.	4	81.00	324.00	0.00	0.00
7	No.8 Strain Insulator	No.	16	25.00	400.00	0.00	0.0
8	Rabbit Conductor +1.5% Sag	Kms	0.487	61515.00	29957.81	3299.00	1606.6
9	Conductor Accessories @ 3%				898.73	0.00	0.0
10	Loading & Unloading of 8Mts pole	No.	3	0.00	0.00	79.00	237.0
11	Miscelanious Materials	L/S			36.46		8.3
12	Total Cost				51100.00		7500.0
13	Total Labour Cost				7500.00		
14	GST @18% on LC				1350.00		
15	PF and ESI Charges @ 17.75% on LC				1331.25		
16	Transportation Charges @2% on Materials				1022.00		
17	Contengency @ 2% on Total Materials +Labour Charges				1172.00		
18	ESCOM Establishment cost @ 20% on labour charges				1500.00		
19	Grand Totals Rs=				64975.25	Say Rs=64975.00	

Certificate:- Certified that I have personally visited the spot and prepared this Estimate in most economical and safe way for Executing the work by using CSR.

Assistant Engineer(Ele) Jaypura O & M Section, CESC, Mysore. Assistant Executive Engineer (Ele) R.K.Nagar Sub-Division, CESC, Mysore.