


□□□□□□□□ □□□□□□ □□□□□□
□□□□ □□□□□□
(□□□□□□ □□□□□□ □□□□□□□□ □□□ □□□□□□)
□□.□□.□□.□□.□□., □□□□
Telephone No :

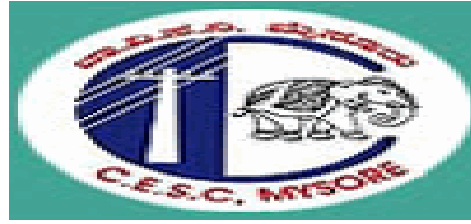

CHAMUNDESWARI ELECTRICITY
SUPPLY CORPORATION LTD

(A Govt. of Karnataka undertaking)

CESC, NR Mohalla Division

Web Site : <https://cescmysore.karnataka.gov.in/>

FORM FOR AWARDING LABOUR CONTRACT WORKS

PART-A RECOMMENDATION FORM

Chamundipuram Sub Division

Office of the Asst Executive Engineer(Ele),
O&M Sub division CESC,

Chamundipuram

To,
Executive Engineer(Ele),
O&M division CESC,
NR Mohalla Division

Sir,

Ref : desw/26-04-2022

I Wish to recommend for awarding the works detailed here under in favour of **ggfff** on labour contract basis as per standard terms and conditions of the Board.

Name of the work : ESTIMATE FOR ARRANGING POWER SUPPLY TO LT5(I) 15HP POWER INSTALLATION BY PROVIDING ADDITIONAL 1X25KVA TRANSFORMER FAVOUR OF D.S SHIVAKUMARA SO A.SHIVALINGAPPA SY NO-02 AT DOORA VILLAGE IN O&M KADAKOLA SECTION CHAMUNDIPURAM SUB-DIVISION MYSORE.

Estimate Autogenerate No : 311242021090

Work Order Date (DD/MM/YYYY)

01/02/2021

WorkOrder NO : F-11834

Work Order Auto Generate No :

3112420210053

Work Order Account Head : 14.4007

Page no.

Work Order no.

work order Autogenerate No

Work Order Date

Printed Date

Page 1 of 4

F-11834

3112420210053

01/02/2021

Thursday, April 28, 2022

Estimate Part : A

Estimate Part Description : EXTENTION OF 11KV LINE

Sl.no	Item Code	Item Name	UOM	Quantity	Labour Charges	Total Labour Charge
1	279020	11kV Horizontal X Arms - Mild Steel (MS)	No	2.00	106.00	212.00
2	279092	HT ST Support 50x6mm Flat - MS	No	2.00	70.00	140.00
3	284108	Rabbit ACSR	Km	0.05	2869.00	143.45

Estimate Part : B

Estimate Part Description : ERECTION OF TRANSFORMER

Sl.no	Item Code	Item Name	UOM	Quantity	Labour Charges	Total Labour Charge
4	304212	11kV 200Amps Single Break GOS	set	1.00	700.00	700.00
5	302122	11kV Class- HG Fuse Unit with Solid Core Insulators	Set	1.00	155.00	155.00
6	287350	400 Sqmm - XLPE HTUG Cable	Km	2.00	92.00	184.00
7	279140	Anchor Rod using 12mm rounds/Guy Rod - MS	No	4.00	390.00	1560.00
8	321437	Distribution Transformer Stacked Core Open Bushing Type for 25kVA Aluminum Wdg Star 1(4 Star)	No	1.00	750.00	750.00
9	279112	Double Pole TC Sets for erection of Transformer on RCC/PSC 9 Mtrs Long Poles For 25/63/100kVA 4/5 Star Rated Transformer using 9 Mtr Long RCC Pole 145kg WL Pole MS	Set	1.00	4527.00	4527.00
10	278911	GI Barbed wire (12mtrs/Kg)- Anticlimbing Device	Each	2.00	28.00	56.00
11	301107	LT Protection kit	No	1.00	226.00	226.00
12	357510	Measuring Equipments for LT Electronic Tri - Vector Meter 5A- Class-0.5 accuracy	No	1.00	150.00	150.00
13	281674	Pipe Grounding-GI Grounding pipe- B - Class- 40mm dia- 2.5mtrs long- 2.9mm thick with bolts nuts-GI Strips and washers complete Minimum Weight of GI Pipe 7.3 Kgs	No	3.00	631.00	1893.00

Page no.

Work Order no.

work order Autogenerate No

Work Order Date

Printed Date

Page 2 of 4

F-11834

3112420210053

01/02/2021

Thursday, April 28, 2022

14	200105	RCC Pole - 9 Mtr Long- 145 Kg WL	No	2.00	1166.00	2332.00
----	--------	----------------------------------	----	------	---------	---------

Estimate Part : C Estimate Part Description : EXTENTION OF LT LINE

SI.no	Item Code	Item Name	UOM	Quantity	Labour Charges	Total Labour Charge
15	279014	LT 4 Pin X Arms - MS	No	3.00	106.00	318.00
16	284108	Rabbit ACSR	Km	0.02	2869.00	57.38

Sub Total : 13403.83

Work Order Part	PartWise Total Cost
A	5183.81
B	170282.28
C	2472.91

Total Estimate Cost : 177939.00

ESI & PF 17.75% of Labour & loc.Allw:	2379.18
CGST 09% of Labour & locality:	1206.34
SGST 09% of Labour & locality:	1206.34

SubTotal 4791.87

Total Cost of the work (Material cost+ Labour Cost):=	149602.69
--	-----------

CESCOM

Account Head	:	14.4007
Work Order number	:	F-11834
Work Order Date	:	01/02/2021
Total Estimate Cost	:	177939.00

Asst Executive Engineer(Ele),
O&M Sub division CESC,
Chamundipuram

Juniour/Assist Engineer(Ele),
O&M Section,

KADAKOLA